

# DLyte 100PRO

The DLyte100PRO is the largest compact machine for industrial applications. It combines a planetary movement and a vertical backand-forth motion inside the drum containing the electrolyte media. It is suitable to treat materials included in the steel, cobalt-chrome, titanium, copper-based, nickel-based and aluminium groups.

The new DLyte 100PRO's advanced PLC-based electronics allows to apply asymmetric pulses with low and high frequency, and parameter concatenation.

DLyte 100PRO's electrolyte lifespan is linked to metal extraction, as it is able to calculate the remaining media lifespan of the electrolyte taking into account material removal. Thanks to the independent conductivity and temperature probes, it offers readings to the automatic electrolyte conditioning system to optimize performance and its usable life.



The advanced software logs key parameters and warnings of the process, thus assuring traceability of the processed batch. All data can be easily extracted and analyzed through the ethernet and usb ports. The new hardware is designed with robust and reliable mechanics to work continuously in mass production. It allows to have an easier access for maintenance and operation. Its new safety system includes a warning light tower which indicates the machine status, and antisabotage security system.

*Workbowl and holder are not included.*

*Light tower, anti-vibratory support, conductivity and temperature calibration system are included.*

## MACHINE SPECIFICATIONS


TECHNICAL DATA (1/2)	
Capacity (per cycle)	180 Ø x 80 mm (maximum volume centered to the axis)
Machine dimensions	950 x 1,320 x 889 mm
Support dimensions	950 x 786 x 710 mm
Machine weight	241 kg
Anti-vibratory support weight	93 kg
Power (single phase with industrial plug)	5 kW (single phase with industrial plug) ☺
Voltage	230 V
Air pressure	4-5 bar (air connector: 8mm or 1/4' BSP')
	Consumption of 40 l/min. The air quality must be 5:4:4* according to ISO 8573 . (*) Air quality required for a maintenance every 6 months (change of filters).
Storage capacity (Anti-vibratory support)	231 l
Distilled water tank capacity	6.5 l (drain valve included)
External antisabotage valve	Yes
Noise level	<70 dB(A)
HMI size	7"
Auxiliar 24 V connector inside cabin for holder accessories	Yes

## MACHINE SPECIFICATIONS

<b>TECHNICAL DATA (2/2)</b>	Tower light	Yes
	Frequency	50-60 Hz
	Index of protection	IP20 (polishing module)

<b>MOVEMENTS</b>	Main axial turning
	Vertical (up/down)
	Holder vibration
	Media refrigeration

## MACHINE DIMENSIONS

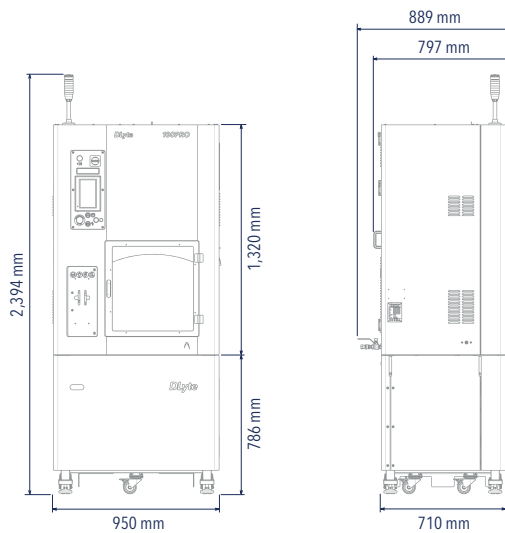

## ELECTROLYSIS WORKBOWL

<b>WORKBOWL TYPE</b>	Cathode Set Dry Electrolyte
	Cathode Set Dry Suspension Electrolyte

<b>WORKBOWL CAPACITY</b>	Workbowl volume	16 L
	Working volume	180 Ø x 80 mm (maximum volume centered to the axis)

