

The Fuse 1+ 30W SLS Ecosystem

High Performance Selective Laser Sintering Within Reach

formlabs 

Fuse 1+ 30W



Take control of your design and production process with our fastest, most powerful SLS printer yet.

ZERO WASTE PRINTING

Due to the advanced packing algorithm and improved refresh rates for every material, you can print with an entirely circular workflow - using all your powder for parts, with little to no waste.

DESIGNED FOR NONSTOP THROUGHPUT

Add a second removable build chamber to start a new print only 1-2 hours after your first production run finishes, increasing your production capacity and enabling continuous printing.

INDUSTRIAL QUALITY PARTS, FASTER THAN EVER

With a more powerful laser and enhanced scanning speed, the Fuse 1+ 30W delivers parts at up to two times the speed as previous generations, allowing designers, engineers, and manufacturers to go from design to finished part overnight.

RELIABLE, ACCESSIBLE, STREAMLINED

The Fuse 1+ 30W printer's inert gas environment ensures that you'll get industrial quality parts, every time, while the user-friendly workflow enables anyone to take ownership over production.

Fuse Sift

Fully compatible with all Fuse Series printers, the Fuse Sift creates an easy, streamlined workflow for industrial quality post-processing.

COMPACT, ENCLOSED SYSTEM

A negative air pressure system keeps powder inside while enabling open access and easy cleanup.

AUTOMATIC POWDER MIXING

Fuse Sift will dispense and mix used and new powder automatically so you can reduce waste and control your powder supply.


NONSTOP PRINTING

Reduce downtime by transferring modular build chambers and powder cartridges between the Fuse 1 and Fuse Sift for a nonstop, cyclical workflow.



Materials

3D print production-ready, end-use parts on the Fuse Series with our family of SLS Powders.*
Our materials, hardware, and software are developed and validated together to deliver peak performance while optimizing cost per part.

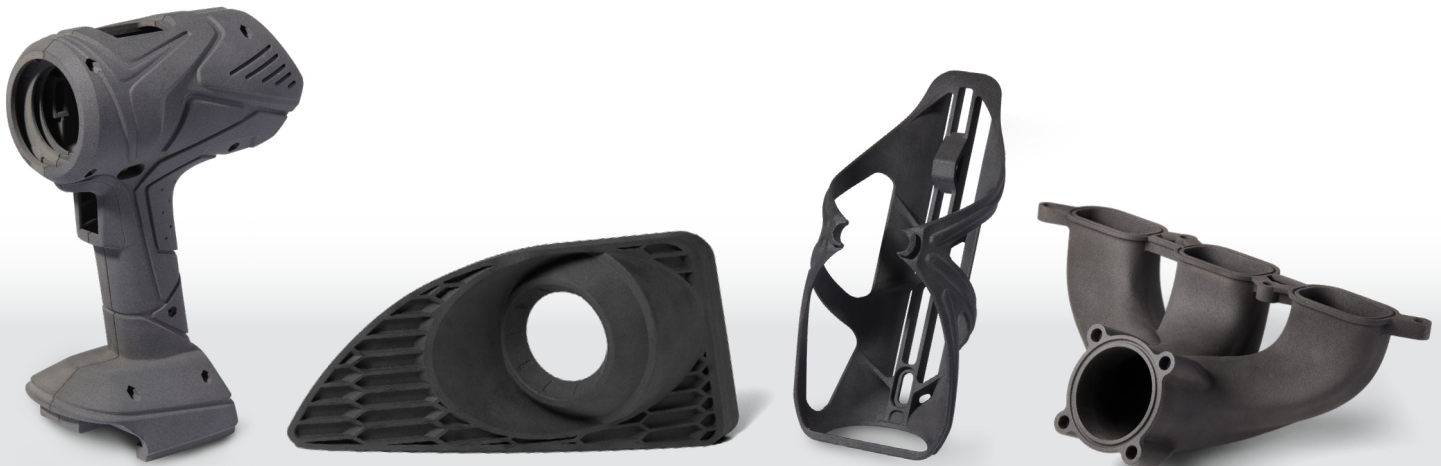

NYLON 12 POWDER

A Material That Does It All

Balancing strength and detail, Nylon 12 Powder is a highly capable material for both functional prototyping and end-use production of complex assemblies and durable parts with high environmental stability.

Tensile Strength	50 MPa
Tensile Modulus	1850 MPa
Elongation at break (X/Y)	11%

NYLON 12 GF POWDER

Stiff, Stable, Functional Parts

A glass-filled material with enhanced stiffness and thermal stability for demanding industrial environments. Choose Nylon 12 GF Powder to produce stiff functional prototypes or end-use parts for applications where structural rigidity and thermal stability are critical.

Flexural Modulus	2400 MPa
Tensile Modulus	2800 MPa
Heat Deflection Temp @ 1.8 MPa	113 °C

NYLON 11 POWDER

High Performance, High Impact

For highly ductile, robust parts, Nylon 11 Powder is our higher performance nylon material for functional prototyping and small batch production. Compared to Nylon 12 Powder, our Nylon 11 Powder is more flexible, less brittle, and better at printing thin walls.

Tensile Strength	49 MPa
Izod Impact Strength	71 J/m
Elongation at break (X/Y)	40%


NYLON 11 CF POWDER

Stiff, Lightweight Strength Reinforced With Carbon Fiber

Our highest strength material reinforced with carbon fiber, Nylon 11 CF Powder enables end-use production of automotive, aerospace, and other highly rugged applications. Compatible with the Fuse 1+ 30W.

Tensile Strength	69 MPa
Tensile Modulus	5300 MPa
Heat Deflection Temp @ 1.8 MPa	178 °C

* SLS Powders available now, many other materials are in development.

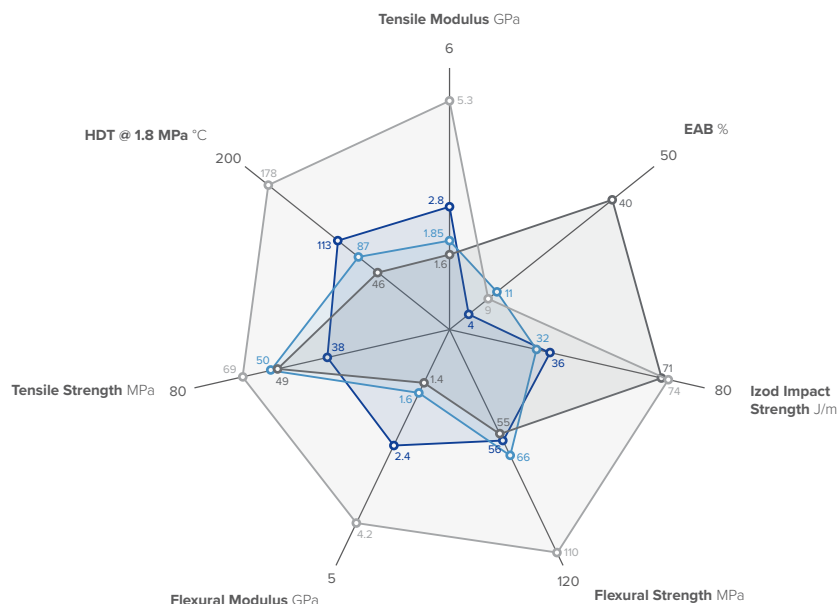

The Fuse Series ecosystem offers a range of high-performance materials with complementary properties to meet your needs for functional prototyping and end-use products.

- **Nylon 12 GF Powder**
- **Nylon 12 Powder**
- **Nylon 11 Powder**
- **Nylon 11 CF Powder**

APPLICATIONS

	NYLON 12 POWDER	NYLON 12 GF POWDER	NYLON 11 POWDER	NYLON 11 CF POWDER
Jigs and Fixtures	Rigid, impact-resistant	Stiff, static, load-bearing	Ductile, high-impact	Stiff, load-bearing, lightweight
Casings, Housings, Enclosures	Balanced stiffness and ductility	Static, mountable	Resilient, pliable	Rigid, impact-resistant
Hot Fluid/Air Components	Not recommended	Manifolds, pipings, ducts	Not recommended	Manifolds, pipings, ducts
Mechanical Connectors	Clips and clamps	Threads, sockets	Snap fits, sliding joints	Snap fits
General Parts	Balanced stiffness and ductility	Static, rigid, unyielding	Flexible, resilient	Strong, unyielding, lightweight

Tech Specs: Fuse 1+ 30W

Technology	Selective laser sintering (SLS)	Printer Dimensions	64.5 × 68.5 × 107 cm (165.5 cm with stand)
	Class 1 Laser Product	(W × D × H)	25.4 × 27.0 × 42.0 in (65.0 in with optional stand)
Build Volume	165 x 165 x 300 mm		114 kg (without build chamber or powder)
	6.5 x 6.5 x 11.8 in	Weight	251.3 lb (without build chamber or powder)
Layer Thickness	110 microns	Startup Time	60 minutes
	0.004 in	Power Requirements	EU: 230 VAC, 7.5 A (dedicated circuit) US: 120 VAC, 15 A (dedicated circuit)
Laser Type	Ytterbium Fiber 30W	Warranty and Service	One Year Warranty included.
Laser Spot Size	200 microns (0.0079 in)		Extended Warranty, Standard Service Plan and Premium Service Plan available.
Material Refresh Rate	30% – 50%	Software Compatibility	Windows 7 and up // Mac OSX 10.6.8 and up
Build Chamber	Modular, compatible with Fuse 1+ 30W, Fuse 1 and Fuse Sift	File Type	STL or OBJ
Print Support Structures	No supports necessary		

100,000,000 Parts Printed With Formlabs Technology



EXPLORE 3D PRINTERS

INSTANT SERVICES QUOTE

proto3000.com
info@proto3000.com
 1-888-887-7686

